

TMX 24VDC


FAN ASSISTED PTC HEATERS

Super compact and light weight fan assisted heater, 24VDC for use in auxiliary and control circuits, where only low voltage power supply is available. Self-regulating PTC element. Touch safe. Spring terminal.



FEATURES	Unit	TMX200.240
Heating Capacity*	W	200
Power supply	V	24VDC
Heating elements type	-	PTC Radiator
Electrical connections	-	Spring terminals for stranded or rigid wire 2.5 mm ²
Protection class	-	Class II
Protection degree EN60529	-	IP20
Operating temperature	°C (°F)	-40 / +70 (-40 / +158)
Storage temperature	°C (°F)	-40 / +70 (-40 / +158)
Axial fan	-	Ball bearing, service life 50.000 hrs at 25°C (77°F), Air flow rate 33m ³ /h, free blow
Mounting	-	Clip for mounting on DIN rail 35 mm EN 50022
Installation position	-	Best efficiency in vertical position
Dimensions HxWxD	mm	88x67x97
Weight (with packaging)	Kg	0.36 (0.40)
Conformity/Certification	-	CE

*at 10°C (50°F) ambient temperature

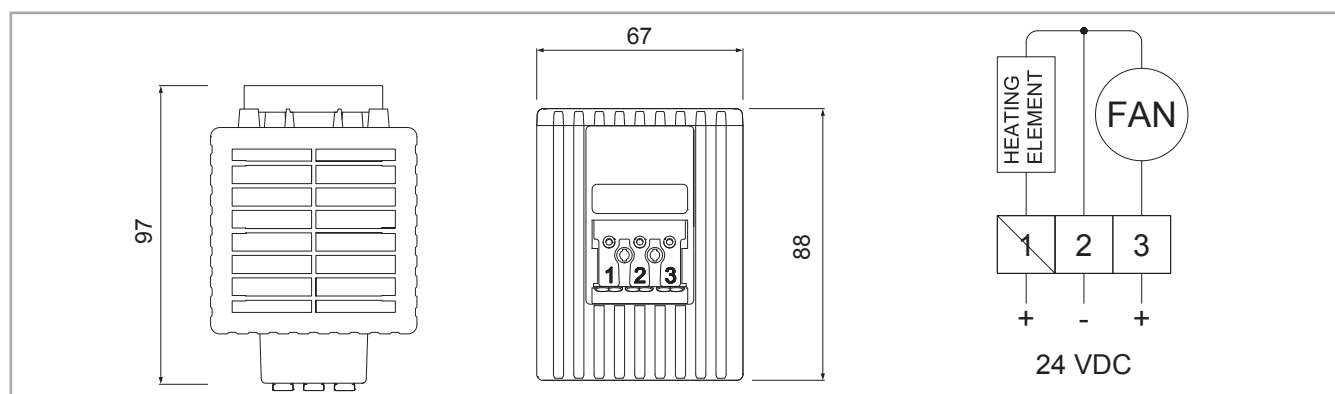

Specifications, values and drawings are subject to change without notice.