



HT.240


COMPACT PTC HEATERS, 24VDC

Compact heaters series with minimum DIN rail foot-print. Power supply at 24VDC



Features	Unit	HT50.240	HT100.240
Heating Capacity*	W	50	100
Power supply	V	24VDC	
Heating element type	-	PTC resistor, self-regulation	
Electrical connections	-	screw terminals for stranded or rigid wire 2.5 mm ²	
Protection class	-	Class II	
Protection degree EN60529	-	IP20	
Operating temperature	°C (°F)	-45/+70 (-49/+158)	
Storage temperature	°C (°F)	-45/+80 (-49/+176)	
Radiator	-	Extruded aluminium profile	
Mounting	-	Clip for mounting on DIN rail 35 mm EN50022	
Installation position	-	Best efficiency in vertical position	
Dimensions HxWxD	mm	110x59x61	140x59x61
Weight (with packaging)	Kg	0.23 (0.25)	0.32 (0.36)
Conformity/Certification	-	CE	

* at 10°C (50°F) ambient temperature

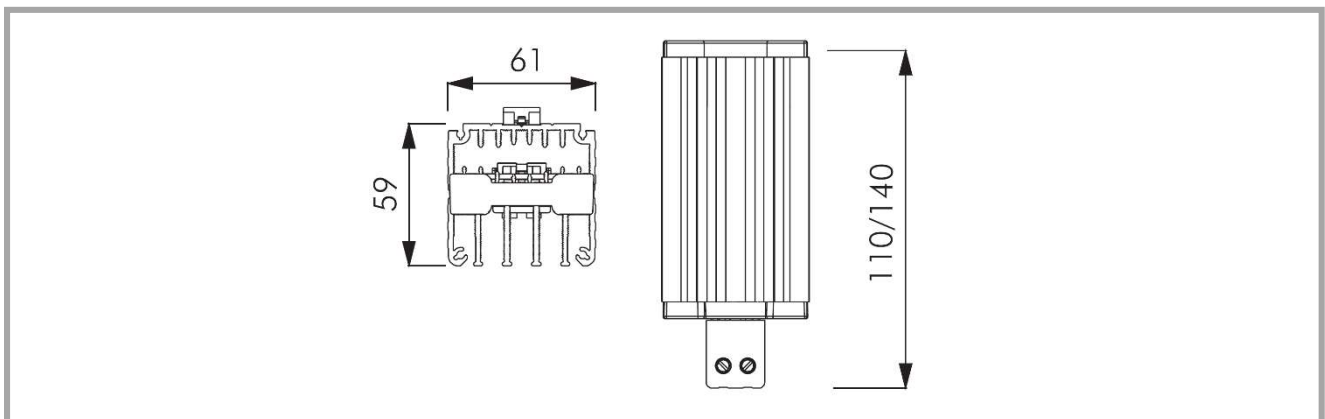

Specifications, values and drawings are subject to change without notice.