



## Automatic Gen-Set Controllers

- CanBus J1939 ECU communication
- Parameter configuration via USB port of your notebook
- Authorised access, secure communication
- Translate LCD text to your language
- Log last 50 events & alarm information with measured values
- Statistics records
- Generator phase sequence control
- Remote Start/Stop, Speed and Idle mode control via J1939
- Power factor measurement for 3 phases
- 4 resistive sender inputs for Level, Temperature, Oil Pressure and Spare
- Selectable Resistive sender types; Pt-100, VDO, US, GM, Ford, Datcon, etc..
- Speed sensing from alternator voltage or magnetic pickup
- 3 phase Load current and earth current measurement
- Configurable 10 inputs and 4 outputs
- ECU power, ECU stop, Stop or Fuel solenoid selection
- Maintenance warning, Red (Shutdown) and Yellow (Warning) alarm lights
- Navigation and Shortcut buttons for easy use
- Load Test selection
- Engine control
- Compatible to Diesel or Gas generators
- Auto, Manual and Test modes
- Active, Reactive, Apparent power measurement
- Adjustable Start, Load and Stop timers
- SPN, FMI and OC values reading from engines via J1939

### Pre-Alarm

- Engine temperature
- Oil pressure
- Fuel level
- Over / Under voltage
- Over / Under frequency
- Over / Under speed

### Fail Monitoring

- Emergency stop
- Multiple engage fail
- Failed to start
- Low oil pressure
- High temperature
- Speed failure
- Voltage
- Charging fail
- Shutdown
- Warning

### Warning & Electrical trip

- Earth fault
- Over current
- Short circuit

### Alarm


- Generator breaker not opened
- Generator breaker not closed

### Controls

- Fuel and Stop solenoid
- ECU power and stop
- Starter motor
- Automatic generator start
- Preheat
- External alarm horn
- Engine cooling
- Idle mode

### Error

- Over / Under speed
- Speed loss
- Earth fault
- Fuel level
- Battery low
- Battery high
- Maintenance
- Over current
- Short circuit
- Engine stop
- CanBus
- Charge alternator

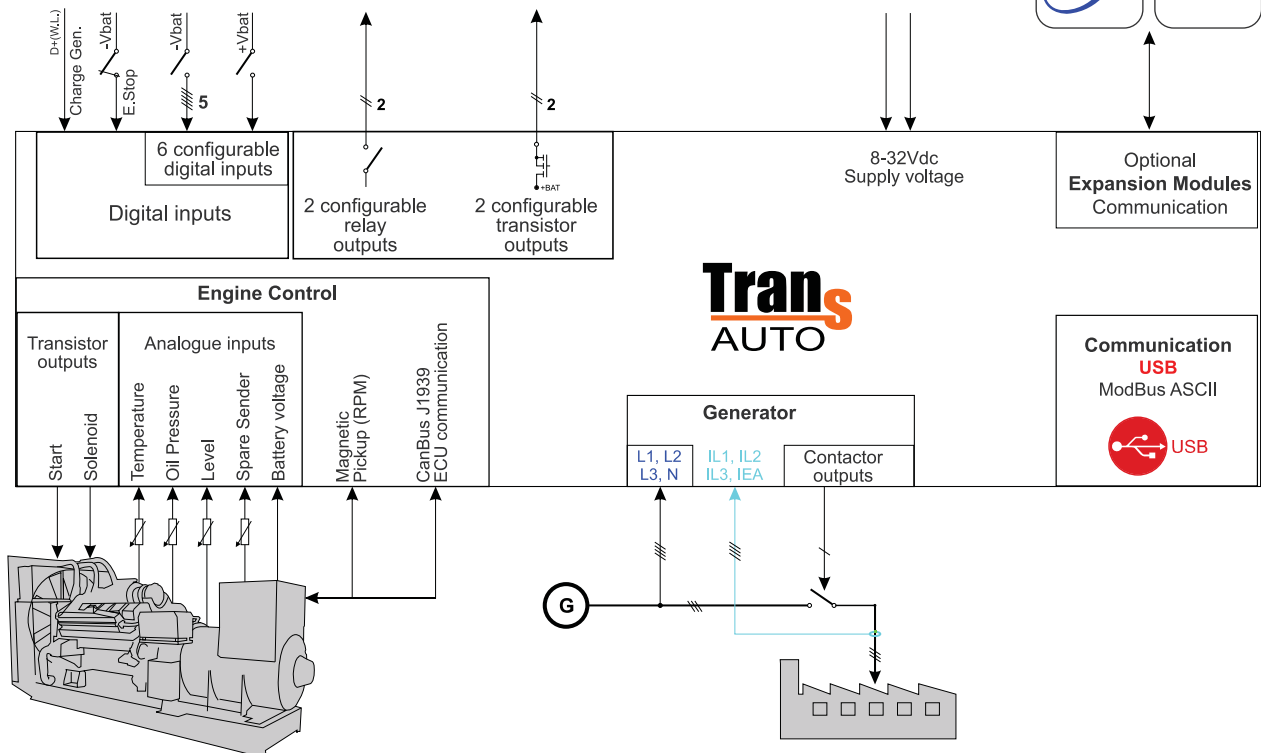

- Dimensions : 229mm x 152mm x 41mm
- Panel Cut-Out : 182mm x 135mm
- Protection : IP65 at front panel
- Weight : Approximately 0,53Kg
- Operating temperature : -20°C to +70°C
- DC battery supply voltage : 8 to 32Vdc, max. operating current is 360mA
- CT secondary : 5A
- Sender Measurement : 0 to 1300 ohm, accuracy: 1%FS, resolution: 1 ohm

**Order Information**

**Trans-AUTO**

Automatic Gen-Set controller, LCD display, J1939 ECU communication